CITY OF DANA POINT

PUBLIC WORKS, WATER QUALITY
33282 Golden Lantern, Suite 212
Dana Point, CA 92629
949.248.3554 · www.danapoint.org

NON-PRIORITY PROJECT WATER QUALITY CHECKLIST

Project Address: _____ APN: _____-_____-____ Permit #: ENG_____

Complete this checklist by indicating in the box next to each requirement: "**YES**" if implemented, "**INF**" if infeasible, or "**N/A**" if not applicable and provide brief explanation for each. Refer to Section 3 of the Technical Guidance Document (TGD), for more information on these requirements & how to implement them, www.danapoint.org/wqrequirements.

	GENERAL REQUIREMENTS
	Stormwater BMPs* are implemented onsite, close to pollution sources.
	Stormwater BMPs* are designed & implemented with measures to avoid vector issues (mosquitos, rodents, etc.)
	SOURCE CONTROL BMP REQUIREMENTS
	Systems are in place to prevent water runoff (other than rainwater) to the storm drain system.
	Stenciling or signage is in place on property storm drains inlets.
	Outdoor material storage areas protect from rainfall, run-on, runoff, and wind dispersal.
	Trash storage areas protect from rainfall, run-on, runoff, and wind dispersal.
	LOW IMPACT DEVELOPMENT (LID) BMP REQUIREMENTS
	Natural areas conserved (including existing trees, vegetation and soils, natural drainage courses, swales, etc.).
	Impervious footprint is minimized(e.g. pervious materials are used; streets, sidewalks, drive and parking lots aisles designed to minimum widths, etc.)
	Soil compaction to landscaped areas is minimized.
	Impervious surfaces are disconnected through distributed pervious areas/landscaped areas designed to effectively receive and infiltrate, retain and/or treat water runoff from impervious areas. (e.g. roof tops drains to a designated landscaped area, use of rain gardens, sheet flow over landscaped area, etc.
	Native or drought tolerant landscaping is used.
	Rainwater harvesting and use strategies are incorporated in the project (e.g. rain barrels).
	Natural storage reservoirs and drainage corridors are maintained or restored.
	Buffer zones are in place for natural water bodies.
	Install the Dry Weather Flow Diversion Basin, S-14. Refer to attached standard detail.

Completed By:_____ Date:_____

*Stormwater BMPs = Best Management Practices used to control water runoff and pollution from properties. Regulations are required pursuant to Municipal NPDES Stormwater Permit Order No. R9-2013-0001 As amended by Order No. R9-2015-0001 and Order No. R9-2015-0100.

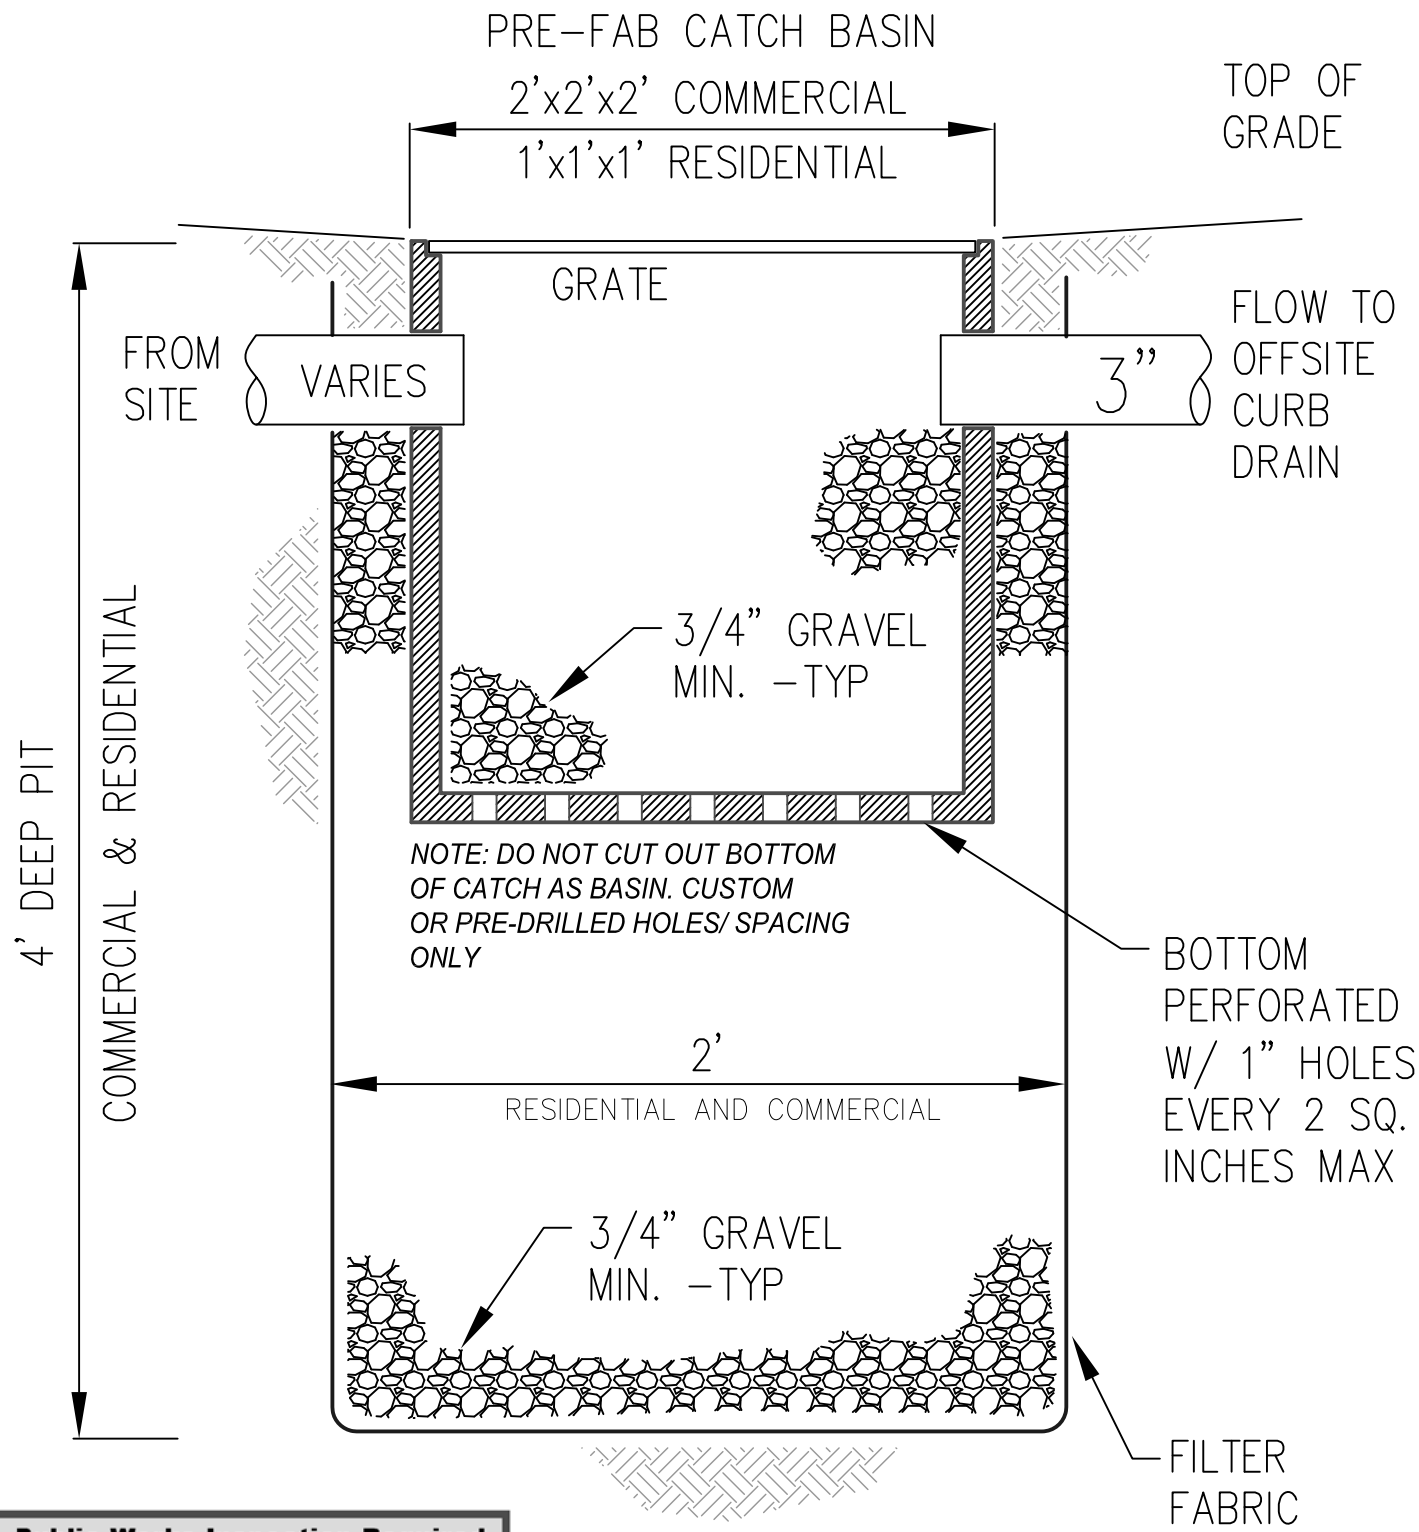

Public Works Inspection Required
Prior to Backfill

Call 949-248-3554

Ask for Basin Inspection

SECTION
NTS

REVISIONS	CITY OF DANA POINT EXHIBIT	
10/19/15	DRY WEATHER FLOW DIVERSION BASIN	S-14
		SHEET 1 OF 1

DWG Name: I:\ENGINEERING SERVICES\Handouts\ENCROACHMENT\City Standard Details\DRYWEATHERFLOW_DIVERSION_REV10-19-15.dwg Plotted by: dbrady on Feb 05, 2016 - 11:44